

# SPECIFICATION

## FOR APPROVAL

Customer : \_\_\_\_\_

Description :                     Piezo Audio Transducer                    

ICC/INTERVOX Model No.:           BRP2310P-12-CS          

Customer's Model No. : \_\_\_\_\_

ISSUE	CHECK	APPROVAL	CUSTOMER
ZhuYu	ShiCong	WangXueWen	
17.04.29	17.04.29	17.04.29	

CHANGES				
NO.	Date	ECN.NO	Edition	Description
1	17.04.29	170429	A0	初稿



**International Components Corporation**

215 McCormick Blvd. Bohemia, NY 11716 USA

Tel: 631-952-9595

Fax: 631-952-9597

E-mail: [oemsales@icc107.com](mailto:oemsales@icc107.com)    [www.icc107.com](http://www.icc107.com)

# SPECIFICATIONS

Model No.

BRP2310P-12-CS

Page

1/5

## 1. ELECTRICAL AND ACOUSTICAL SPECIFICATION

	Item	Unit	Specifications
1-1	Rated Voltage	VDC	12
1-2	Operating Voltage	VDC	3-28
1-3	* Rated Current (Max)	mA	10
1-4	* Min Sound Output at 30cm	dB	85
1-5	* Resonant Frequency	Hz	3500 ± 500
1-6	Tone Nature		Single
1-7	Operating Temperature	°C	-30~+70
1-8	Storage Temperature	°C	-40~+85
1-9	Weight	g	4.2
1-10	Housing Material		PBT (Black)
1-11	Lead Pin Material		Red Copper (DSn)

\* Value Applying at Rated Voltage(VDC)

		17.04.29	ZhuYu	ShiCong	WangXueWen
Issue No	Description	Date	Issue	Check	Approval

International Components Corporation

# SPECIFICATIONS

Model No.

BRP2310P-12-CS

Page

2/5

## 2.ENVIRONMENTAL TEST

Item	Specifications
2-1 Storage in High temp.	Storage in $+85^{\circ}\text{C} \pm 2^{\circ}\text{C}$ test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
2-2 Storage in Low temp.	Storage in $-40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
2-3 Storage in Humidity	Storage in $+40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 90-95%RH test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
2-4 Thermal cycle test.	<p>Make this test for 5 cycles without applying power, then expose to the room temperature for 2 hours.</p>
2-5 Vibration test	<p>Amplitude: 1.5mm Time : 1min/axis</p> <p>Make this test for the directions of X,Y, Z for 2 hours each (total 6 hours).</p>
2-6 Drop test	Free drop a unit from the height 100cm to the surface of 10mm thick board ,three directions(X,Y,Z).
2-7 Solderability test	Soldering temp.: $260 \pm 5^{\circ}\text{C}$ Heat applying time: $3 \pm 0.5\text{sec}$ .

### PASS CRITERION :

After these tests , the change of S.P.L shall be within  $\pm 5 \text{ dB}$  .

		17.04.29	ZhuYu	ShiCong	WangXueWen
Issue No	Description	Date	Issue	Check	Approval

International Components Corporation

# SPECIFICATIONS

Model No.

BRP2310P-12-CS

Page

3/5

## 3.MEASURING METHOD(BUZZER MODE)

### 3-1 .Test Condition

#### 3-1-1.STANDARD

Temperature :  $25 \pm 3^{\circ}\text{C}$

Relative humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

#### 3-1-2.JUDGEMENT

Temperature : 15 ~  $35^{\circ}\text{C}$


Relative humidity : 45% ~ 85%,

Atmospheric pressure : 860mbar to 1060mbar.

### 3-2 . Standard Test Fixture

1.rated Voltage: 12VDC

2.Resonant Frequency:  $3500\text{Hz} \pm 500$

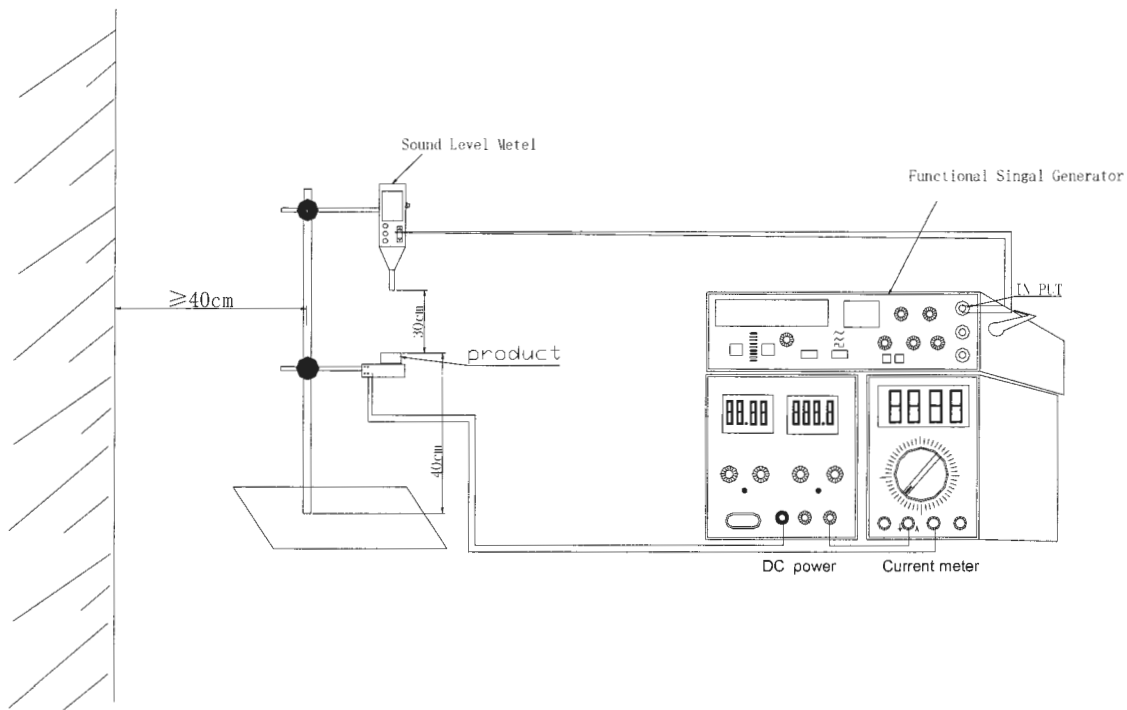

		17.04.29	ZhuYu	ShiCong	WangXueWen
Issue No	Description	Date	Issue	Check	Approval

International Components Corporation

# SPECIFICATIONS

Model No.


BRP2310P-12-CS

Page

4/5

## 4.DIMENSIONS

Unless otherwise specified, tolerance:  $\pm 0.5$ (unit:mm)

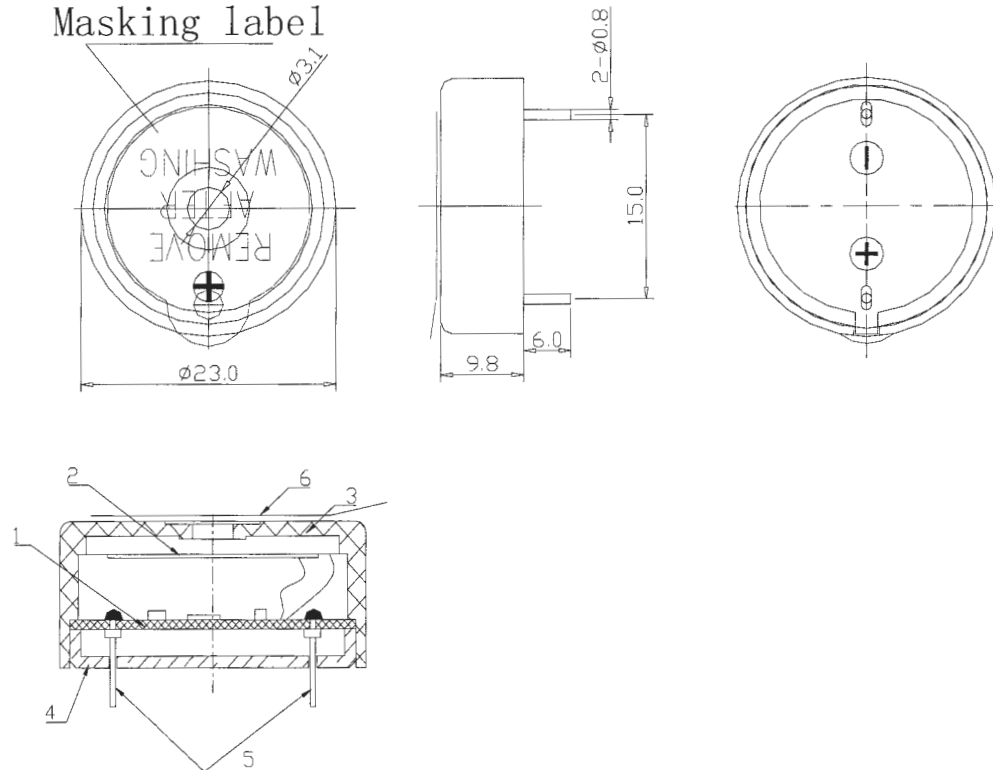

- 1) All parts must be meet to ROHS.
- 2) Wave solder and wash allowed.

6	Masking label	1	Paper	
5	Lead pin	2	Red Copper (DSn)	
4	Cover	1	Black PBT	
3	Housing	1	Black PBT	
2	Piezo element	1	Brass	
1	PCB	1	Epoxy Board	
Part No.	Part Name	Q'TY	Material	Remark

		17.04.29	ZhuYu	ShiCong	WangXueWen
Issue No	Description	Date	Issue	Check	Approval

International Components Corporation

# SPECIFICATIONS


Model No.

BRP2310P-12-CS

Page

5/5

## 5.PACKING

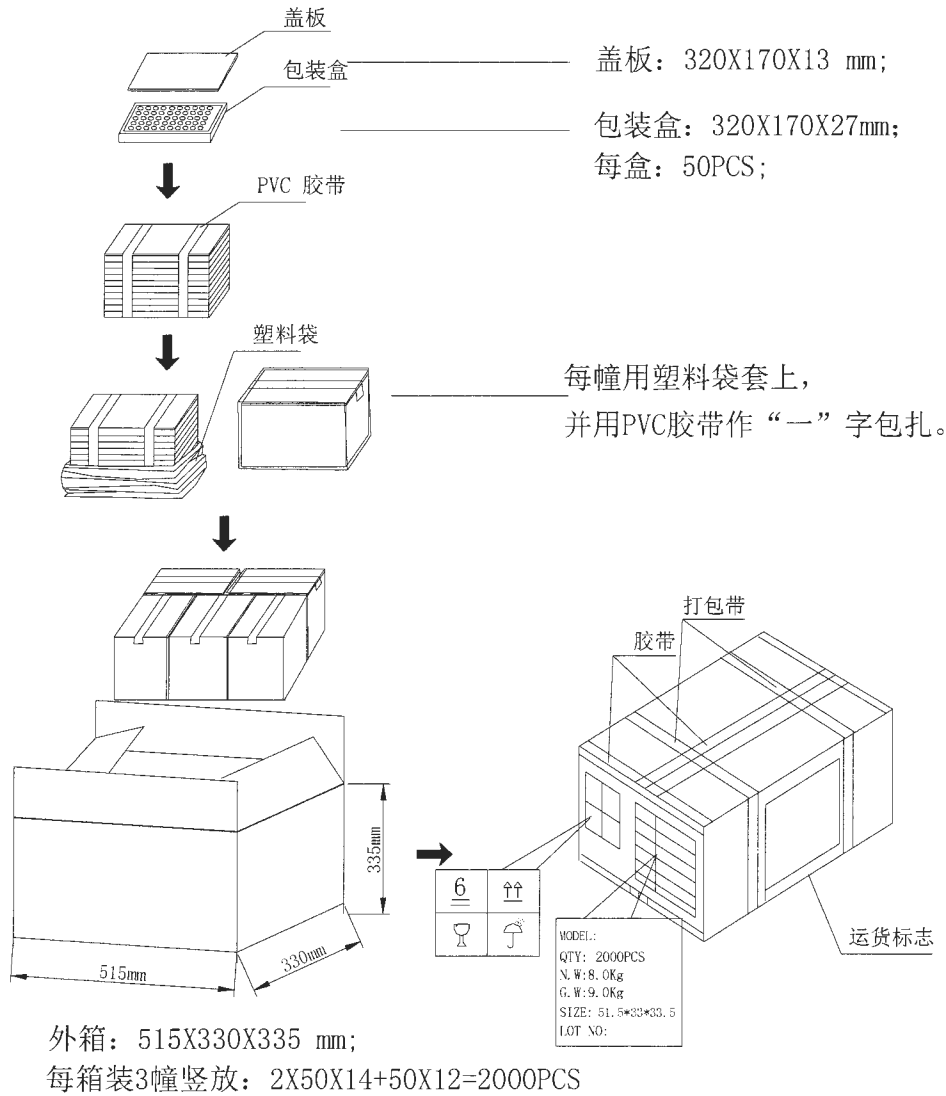

外箱用PVC胶带作包扎, 然后用包装带作平行包扎。  
一箱装好后, 根据要求填写内容。

		17.04.29	ZhuYu	ShiCong	WangXueWen
Issue No	Description	Date	Issue	Check	Approval

International Components Corporation