



ELECTRO-ACOUSTIC TRANSDUCER

BRT2821-D Series


(Dual Tone)

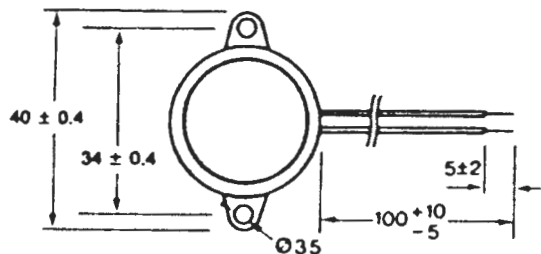

TOP VIEW



TOP VIEW



SIDE VIEW

SPECIFICATIONS:

Operating Voltage (V)	Rated Voltage (V)	Rated Current (mA)	Resonant Frequency (KHz)	Sound Output @30cm (dB)	Pulse Rate at Rated Vltge (Pulse/Sec)
4 - 9	6	35/10	2.8 ± 0.2	85/70	2 - 7
6 - 11	9	35/15	2.8 ± 0.2	85/75	2 - 7
8 - 15	12	40/15	2.8 ± 0.2	90/80	2 - 7

THE ABOVE IS SINGLE/PULSE TONE AND IS AVAILABLE WITH 3 LEADS.

INTERVOX
International ©

INTERNATIONAL COMPONENTS CORPORATION
215 MCCORMICK DRIVE, BOHEMIA, NY 11716
FAX: 631-952-9595 FAX: 631-952-9597

Title:

Electro Acoustic Transducer

NF

Intervox Model #

BRT2821-D

Rev
A

Scale:

Date: 02/03/93

Sheet 1 of 1