





ELECTRO-ACOUSTIC TRANSDUCER

BRT2821-P Series

(Pulse Tone)

RoHS Compliant

SPECIFICATIONS:

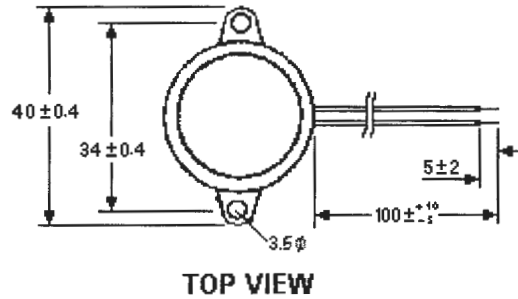

All dimensions are in mm.

Operating Voltage (V)	Rated Voltage (V)	Rated Current (mA)	Resonant Frequency (KHz)	Sound Output @30cm (dB)	Pulse Rate @Rated Vltge (Pulse/Sec)
1 ~ 3	1.5	5	2.8 ± 0.2	70	2 - 7
2 ~ 5	3	8	2.8 ± 0.2	73	2 - 7
4 ~ 9	6	10	2.8 ± 0.2	78	2 - 7
6 ~ 11	9	10	2.8 ± 0.2	80	2 - 7
8 ~ 15	12	15	2.8 ± 0.2	85	2 - 7
15 ~ 28	24	20	2.8 ± 0.2	85	2 - 7

THE ABOVE IS PULSE TONE AND IS AVAILABLE IN LEAD OR PIN TYPE.

INTERVOX
International ©

International Components Corporation

215 McCormick Drive, Bohemia, NY 11716 631-952-9595 Fax: 631-952-9597 Web: www.icc107.com

Title:

Electro Acoustic Transducer

NF

Intervox Model #
BRT2821-P Series

Rev
A

Scale:

Date: 04/28/2011

Sheet 1 of 1