


Surface Mount External Drive Piezo Transducer BSP1602SM-25-GW RoHS Compliant

Features:

- SMD mounting
- Compatible with convection, IR and vapor phase

Applications:

- Cellular phones
- Computers, modems, PC
- Pocket pagers
- Alarm clocks

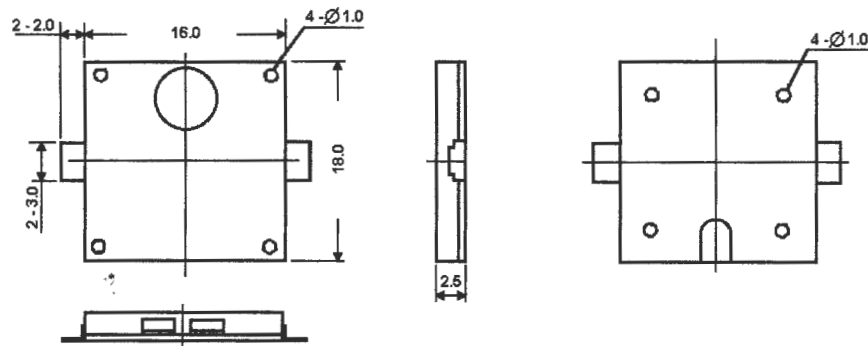

SPECIFICATIONS:

| TYPE | BSP1602SM-25-GW |
|----------------------------------------------|-----------------|
| RATED VOLTAGE (Vp-p) | 3 |
| OPERATING VOLTAGE (Vp-p) | 1 ~ 25 |
| *SOUND OUTPUT(dB) @4000Hz, 10cm, Square Wave | MIN. 75 |
| RESONANT FREQUENCY (KHz) | 4 ± 0.5 |
| *MAX. CURRENT CONSUMPTION (mA) | 1 |
| CAPACITANCE @ 1000Hz (pF) | 14000 ± 30% |
| OPERATING TEMPERATURE (C) | - 20 ~ + 70 |
| STORAGE TEMPERATURE (C) | - 30 ~ + 80 |
| WEIGHT (g) | 1 |

*Value applying at rated voltage

INTERVOX
International ©

INTERNATIONAL COMPONENTS CORPORATION
215 MCCORMICK DRIVE, BOHEMIA, NY 11716
FAX: 631-952-9595 FAX: 631-952-9597

Title: **Surface Mount External Drive
Piezo Transducer**

Tolerance: Intervox Model # **BSP1602SM-25-GW** Rev.


Unit: mm

Date: 3/02/2006

Sheet 1 of 1

INTERVOX PIEZO BUZZER BSP1602SM-25-GW

X:4.0156kHz Y:82.75dB ZA:Live Curve TSR fund.

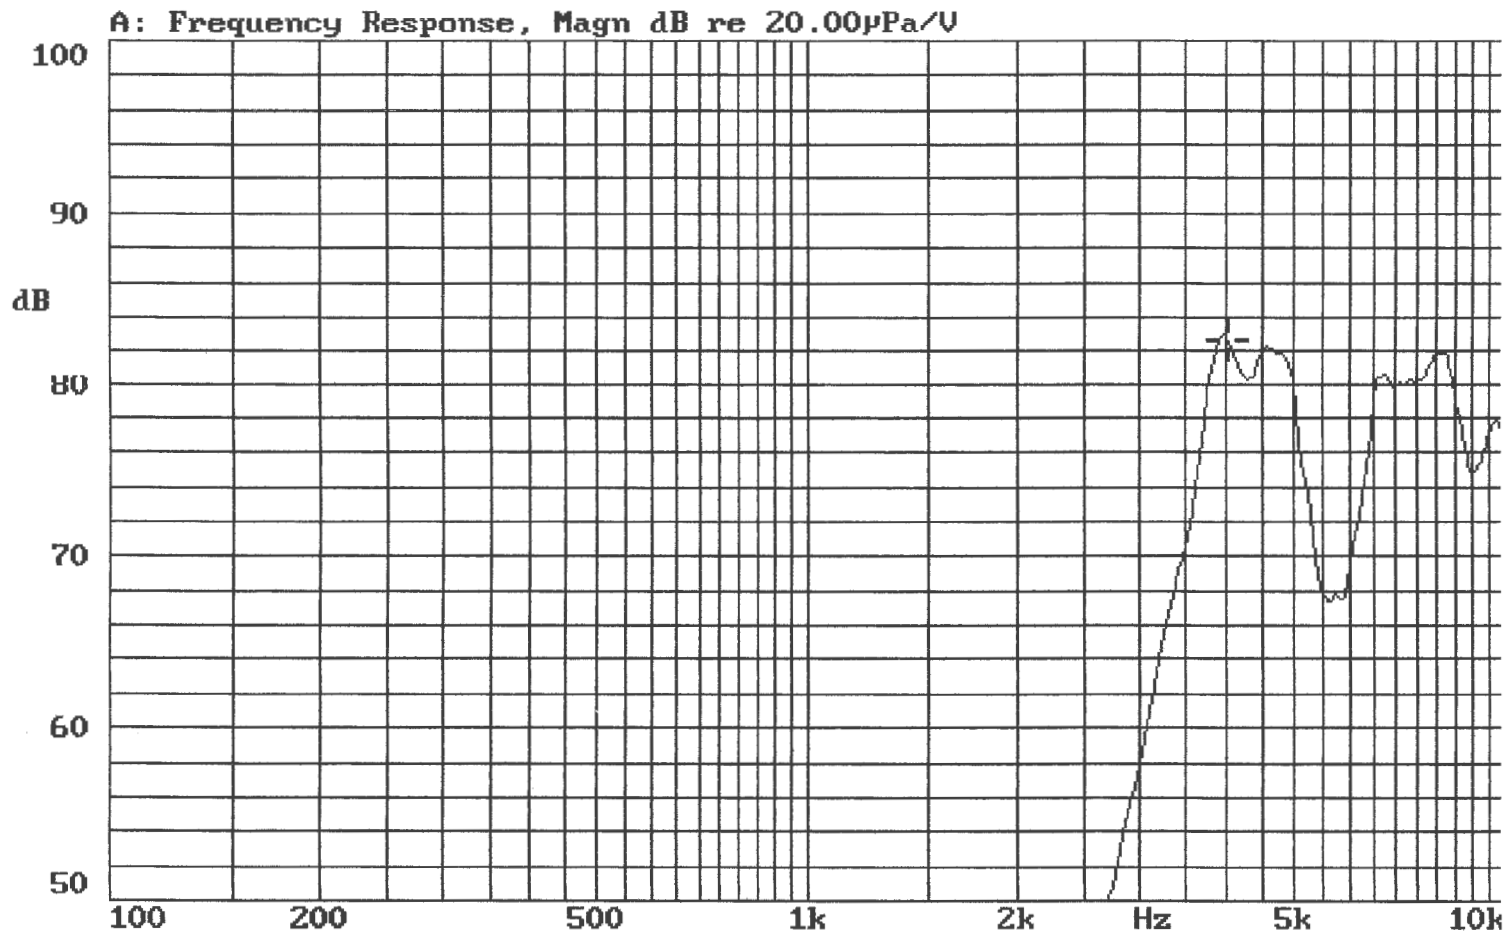

27-APR-2000 14:32:44

Mode: TSR



INTERVOX
International ©
International Components Corporation

SPECIFICATIONS


Model No.

BSP1602SM-25-GW


Page

1/1


PACKING




800PCS/TAPE




800PCS/SPOOL



5SPOOL/BOX
4000PCS/BOX
box size:340x340x300mm;

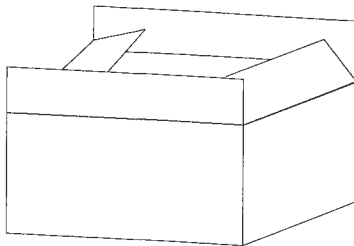

box size:358x358x615mm;
4000x2=8000pcs/box

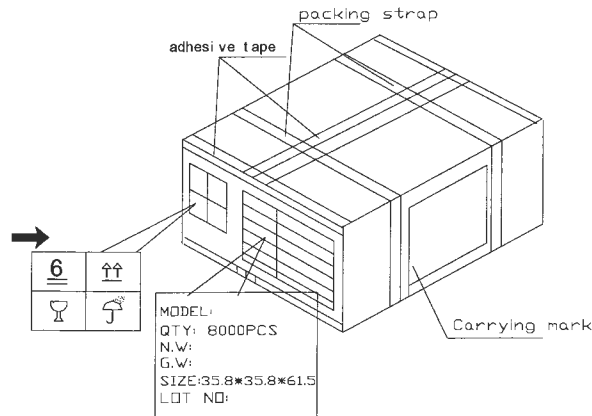

| | | | | | |
|----------|-------------|----------|------------|---------|------------|
| | | | | | |
| | | 04/26/07 | TangYuJing | ShiCong | WangXueWen |
| Issue No | Description | Date | Issue | Check | Approval |

INTERNATIONAL COMPONENTS CORPORATION