



PC MOUNT SPEAKER

S125R-PC Series

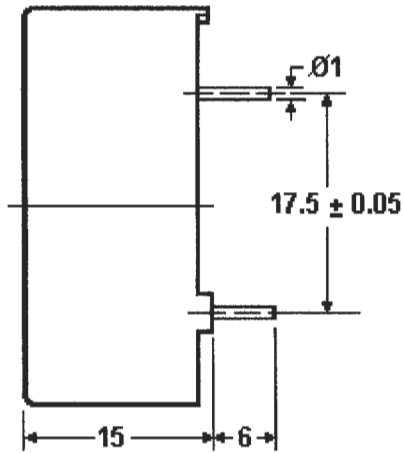

UNIT (MM)

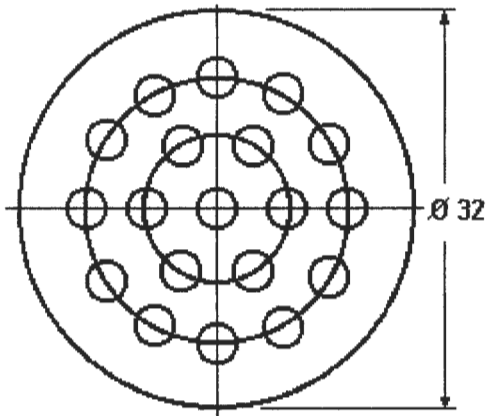

SPECIFICATIONS

Model Number	S125R-PC
Voice Coil Impedance (ohm)	$8 \pm 20\%$
Nominal Power Rating (Watt)	0.15
Maximum Power Rating (Watt)	0.20
Sound Output Level (dB) at 1K Hz 10 cm	83 ± 3
Frequency Range (Hz)	700 ~ 4000
Resonant Frequency	1100 ± 150
Temperature (°C)	-20 to +70
Housing Material	NORYL

INTERVOX
International ©

International Components Corporation

215 McCormick Dr., Bohemia, NY 11716 (631) 952-9595 (631) 952-9597

Title:

Intervox Speaker

Intervox Model #

S125R-PC

Rev

Scale:

Date:

Sheet 1 of 1

INTERVOX Speakers from International ©

Measuring Object: S125R-PC Measuring Condition: 1.41 V 0.25 W 0.1 M
 Level Range: 60 dB Zero Level (Fundamental) : 60 dB X Axis Speed: _____ mm/sec
 Impedance Range: 8 Ω Zero Level (Harmonic) : _____ dB Y Axis Speed: _____ mm/sec

