
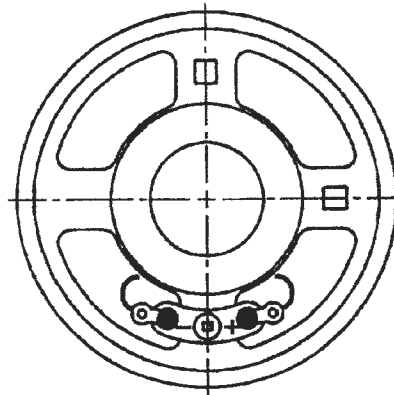


# INTERVOX Speakers from **International C**

215 McCormick Drive, Bohemia, NY 11716 (631) 952-9595 (631) 952-9597 www.icc107.com

1. <b>MODEL:</b>	<b>S225RL-M</b>	
2. Dimension	Outer Diameter 57 mm.	Baffle Opening 51.8 mm
	Height Refer to Drawing.	Weight 14.8 grams
3. Magnet	Materials: Rare Earth	Size: 12.5 $\varnothing$ x 1.5 mm.
4. Nominal Impedance	8 ohm $\pm$ 15 % at 1000 Hz.	
5. Power Rating	Normal 300 mW.	Maximum 500 mW
6. Lowest Resonant Frequency	390 $\pm$ 150 Hz	
7. Output Sound Pressure Level (S.P.L.)	93 $\pm$ 3 dB / 0.3 Watt 0.5 Meter	
	Average at 600, 800, 1000, 1200 Hz	
8. Frequency Range	200 ~3800 Hz.	Average SPL - 10 dB
9. Distortion	10 % Maximum At 400 Hz. 300 mW	
10. Abnormal Sound Test	Must be Normal Tested By 1.6 Volts. Sine Wave	
11. Load Test	White Noise with Weighted Filter 1.6 Volts. (RMS) 24Hrs.	
12. Polarity	Diaphragm shall move Forward when Apply a	
	Positive DC Current to the "+" or "Marked" Terminal	

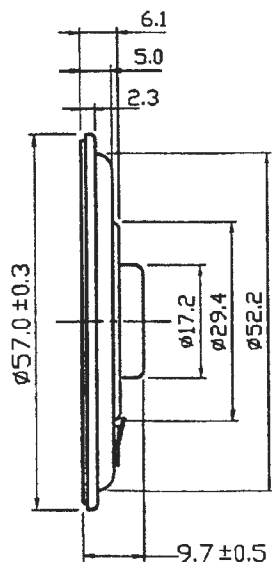

Unit: mm

Housing Material: METAL

# INTERVOX Speakers from International ©

Measuring Object: S225RL-M Measuring Condition: 1.549 V 0.3 W 0.5 M  
Level Range: 82.94 dB Zero Level (Fundamental): \_\_\_\_\_ dB X Axis Speed: \_\_\_\_\_ mm/sec  
Impedance Range: \_\_\_\_\_  $\Omega$  Zero Level (Harmonic): \_\_\_\_\_ dB Y Axis Speed: \_\_\_\_\_ mm/sec  
X: 6.7000k Hz. \*Y: 82.94 dB ZA: Live Curve SSR Fund Code 450

