



# INTERVOX Speakers from International ©

215 McCormick Drive, Bohemia, New York 11716 (631) 952-9595 Fax:(631) 952-9597 e-mail:oemsales@icc107.com  
**G52**

ICC Part No.	<b>S250SA</b>	
1. Voice Coil Imp.	8 $\Omega$ $\pm$ 15%	At 1000 Hz 1 Volt
2. Operation	Must be normal	Program Source 0.8W
3. Buzz & Rattles	Must be normal	Sin Wave 0.8W
4. Resonant Freq.	350 $\pm$ 50 Hz	Without Baffle
5. Output S.P.L.	91 $\pm$ 3 dB/W Mean Value at 0.5, 0.6, 0.8, 1.0 KHz	From 50cm Measurement 0.8W
6. Freq. Response	FO ~ 5000 Hz $\pm$ 10 dB	
7. Rated Freq. Response	Hz	
8. Rated Power Input	0.5W	
9. Max. Power Input	0.8W	
10. Load Test	After Test Meet Items 2 & 3	White Noise 0.5W 5 Hours
11. Heat Test	After Test Meet Items 2 & 3	40° $\pm$ 2° C 50% R.H. 48 Hours
12. Humidity Test		40° $\pm$ 2° C 90% R.H. 48 Hours
13. Distortion	5% Max.	Rated Power Input 1000 Hz
14. Total Flux	Maxwell	
15. Flux Density	6300 Gauss	
16. Magnet	Material: Rare Earth	Size: 13 x 10mm      Weight: .35 oz.
17. Total Weight	1.65 oz.	
18. Baffle Opening	60mm	
19. Outside Diameter	66.5 x 66.5 mm	(Eliminate Rim: 60.2mm)
20. Total Height	21.4mm	
21. Yoke Size	22 x 14.2 x 12.5mm	Outside Diameter of Seat: 32mm
22. Mounting Diameter	Diameter: 73.5mm	Mounting Hole: 4.5 x 6mm

# INTERVOX Speakers from International ©

215 McCormick Drive, Bohemia, New York 11716 (631) 952-9595 Fax:(631) 952-9597 e-mail:oemsales@icc107.com

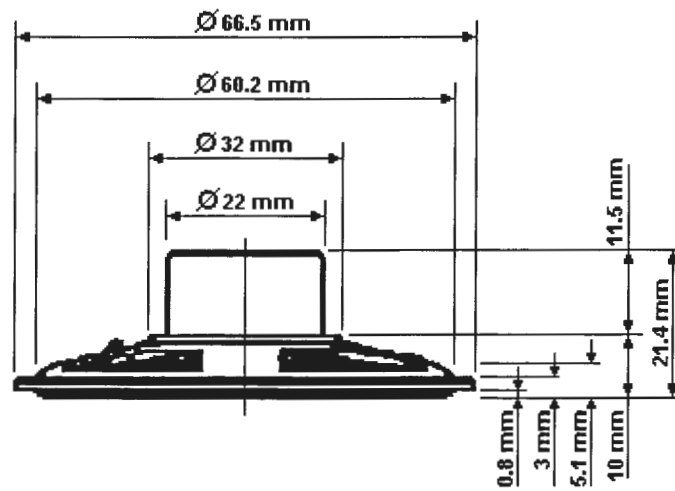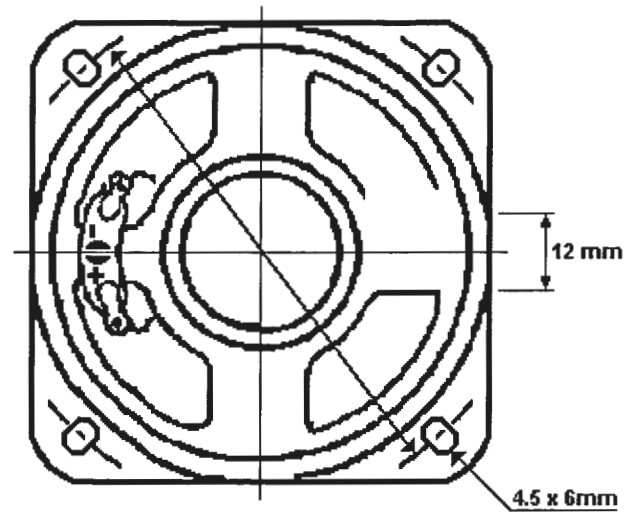

Part No.: S250SA	All Tolerances $\pm 0.1$
Size: 66 mm 2.5"	Unit: mm
	Scale: 1:1

