
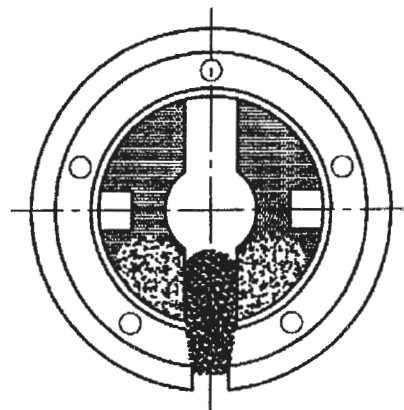


# INTERVOX Speakers from International C

215 McCormick Drive, Bohemia, NY 11716 (631) 952-9595 (631) 952-9597 www.icc107.com

1.	<b>MODEL:</b>	SR500RS-M			
2.	Dimension	Outer Diameter	13.6 mm.	Baffle Opening	13.5 mm.
		Height	Refer to Drawing .	Weight	1.6 Grams.
3.	Magnet	Materials	Rear Earth .	Size	∅ 6.5X1.5 mm.
4.	Nominal Impedance	8 Ω	± 15 %	At	1500 Hz.
5.	Power Rating	Normal	50 mW.	Maximum	100 mW.
6.	Lowest Resonant Frequency	1000	± 20 %		Hz.
7.	Output Sound Pressure Level (S.P.L.)	83	± 3 db /	0.05 Watt	0.1 Meter.
		Average at 1000, 1200, 1500, 2000 Hz.			
8.	Frequency Range	550	~ 20000 Hz.	Average SPL - 10 db.	
9.	Distortion	5 %	Maximum At	1000 Hz.	50 mW.
10.	Abnormal Sound Test	Must Be Normal Test By		0.64 Volts.	Sine Wave.
11.	Load Test	White Noise With Weighted Filter		0.64 Volts.(RMS)	24 Hrs.
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.			
		Current to the "+" or "Marked" Terminal.			

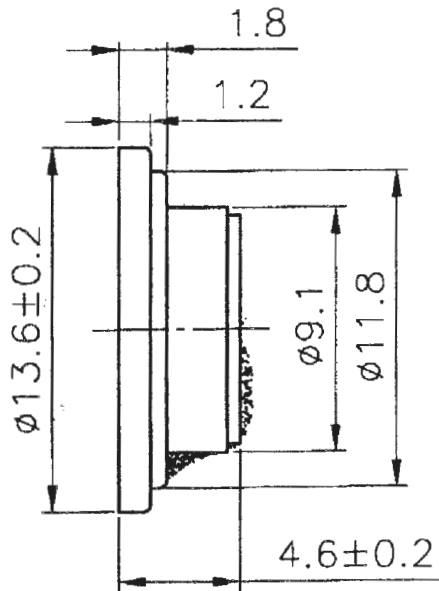

450

Unit : mm

Housing Material : METAL

# INTERVOX Speakers from International ©

SR500RS-M

450


UOL:0.632(0.05W) DIS:0.1M

X:1.0000kHz

\*Y:83.80dB

ZA:Live Curve

SSR Fund.

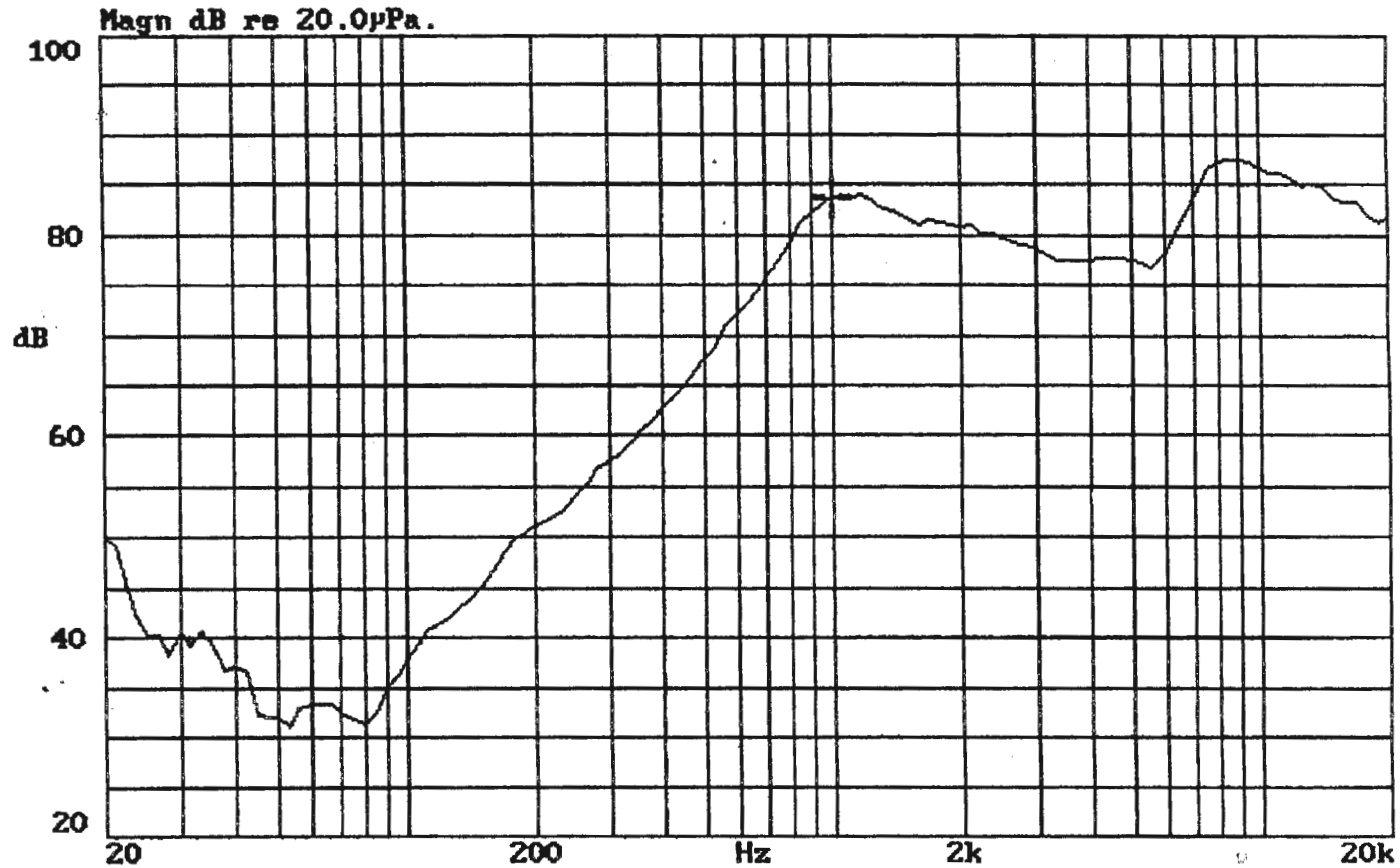

03-AUG-1999 11:10:11

Mode: SPEAKER

