




INTERVOX Speakers from International C

215 McCormick Drive, Bohemia, NY 11716 (631) 952-9595 (631) 952-9597 www.icc107.com

1.	MODEL:	SR900RL-M					
2.	Dimension	Outer Diameter	23	mm.	Baffle Opening	20.1	mm.
		Height	Refer to Drawing		Weight	4.0	Grams.
3.	Magnet	Materials	Rare Earth		Size	∅ 9.5X1.5	mm.
4.	Nominal Impedance	8	Ω	\pm	15	%	At 1500 Hz.
5.	Power Rating	Normal	500	mW.	Maximum	1000	mW.
6.	Lowest Resonant Frequency	670	\pm	20	%	Hz.	
7.	Output Sound Pressure Level (S.P.L.)	80 \pm 3 db / 0.5 Watt · 0.5 Meter.					
		Average at	800,	1000,	1200,	1500	Hz.
8.	Frequency Range	500	~	20000	Hz.	Average SPL - 10 db.	
9.	Distortion	5	%	Maximum At	1000	Hz.	500 mW.
10.	Abnormal Sound Test	Must be Normal Tested By 2.0 Volts. Sine Wave.					
11.	Load Test	White Noise with Weighted Filter 2.0 Volts.(RMS) 24 Hrs.					
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.					
		Current to the '+' or 'Marked' Terminal.					

MOUNTING NOTICE

At least
0.5mm
For
Diaphragm
Moving

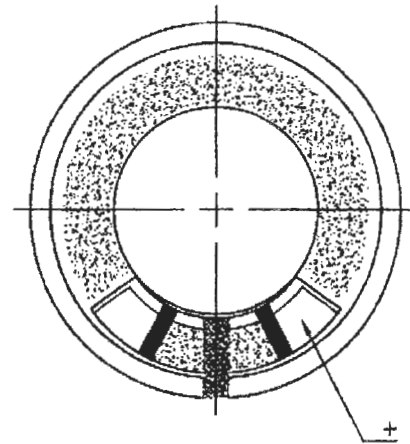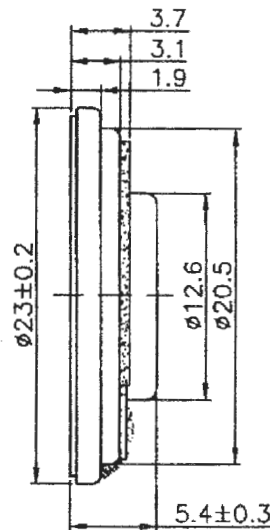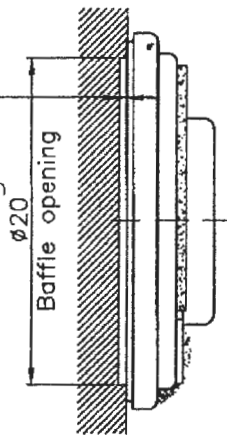


Unit : mm

Housing Material : METAL

SR900RL-M

VOL:2.0V(0.5W) DIS:0.5M
X:1.0000kHz *Y:82.07dB ZA:Live Curve SSR Fund.

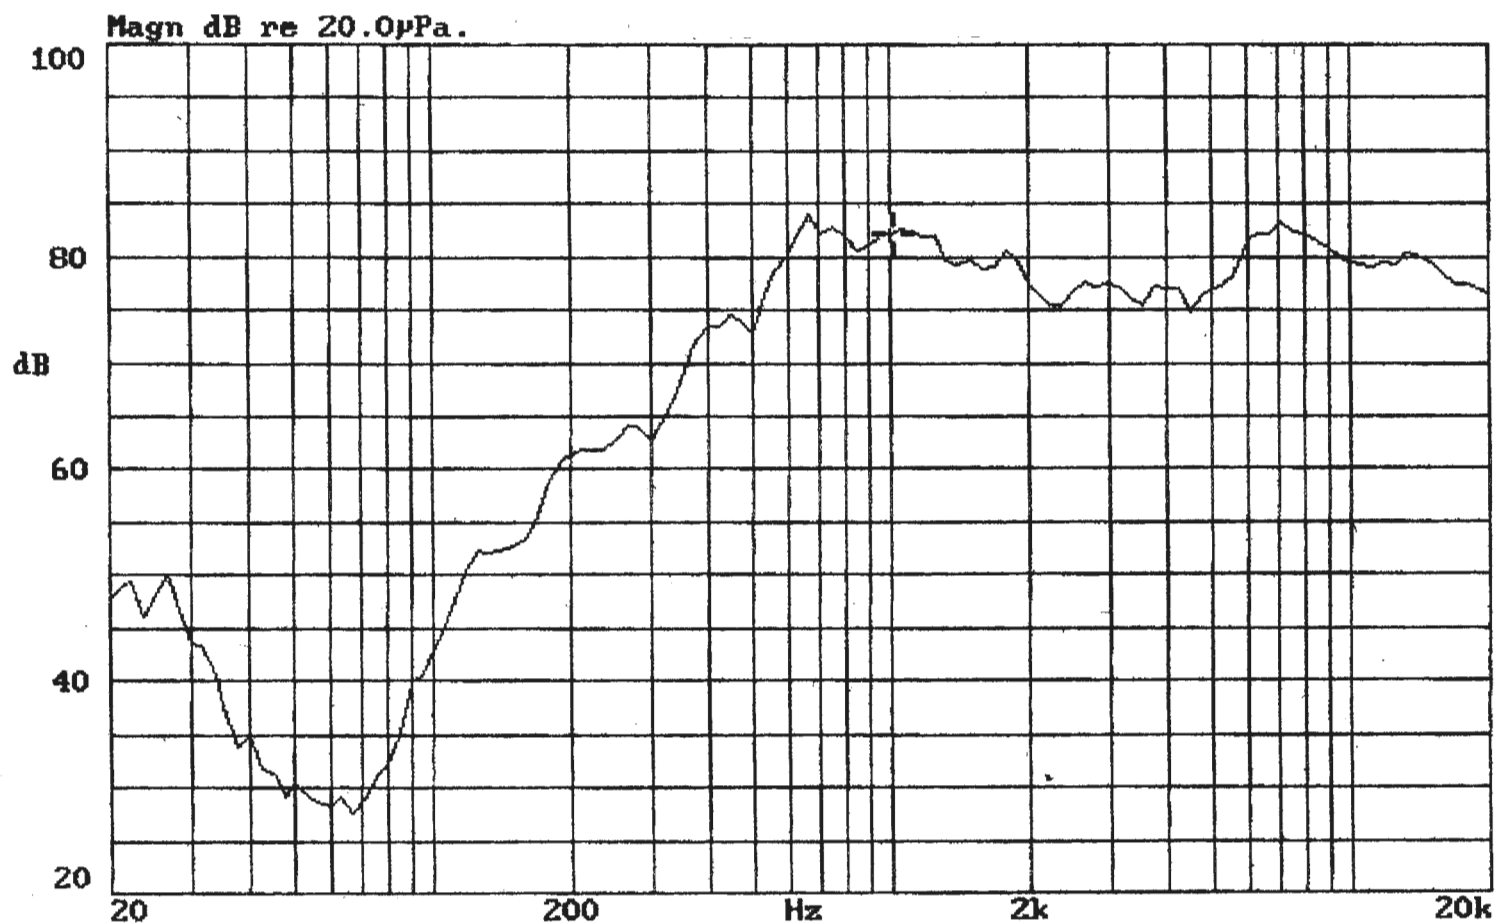

02-APR-2001 14:08:51

Mode: SSR

