

ELECTRET CONDENSER MICROPHONE

MEC-422PD-02-744


Noise Cancelling

SPECIFICATIONS:


TYPE	MEC-422PD-02-744
FREQUENCY RESPONSE (Hz)	100 ~ 10,000 Hz.
DIRECTIVITY	Noise Cancelling
SENSITIVITY ($0\text{dB}=1\text{V}/\mu\text{bar}$)	- 74 (-744)
TOLERANCE	$\pm 4\text{dB}$
SENSITIVITY REDUCTION	Within $-3.0\text{dB}@1.5\text{V}$
S/N RATIO	More than 30 dB
OUTPUT IMPEDANCE	Low
MAX. OPER. VOLTAGE(VDC)	10 V
OPERATING VOLTAGE (VDC)	2 V
CURRENT CONSUMPTION (mA)	Max 0.5
DIMENSIONS (mm)	4.5 x 2.2
TERMINATION	PD = Pad

*Also available in Back Electric


Typical Frequency Response Curve:

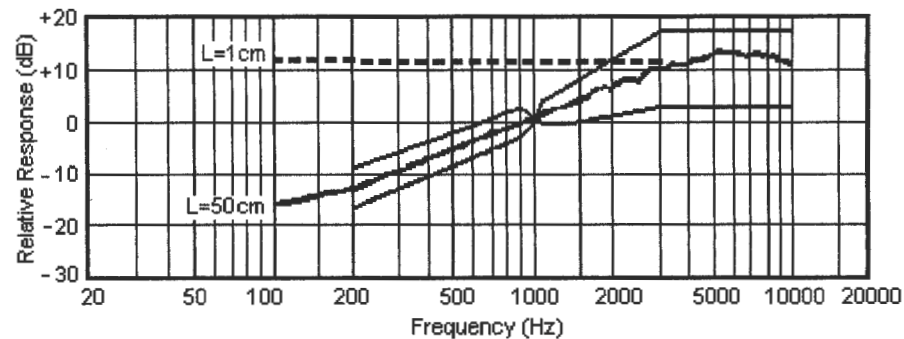

Dimensions:

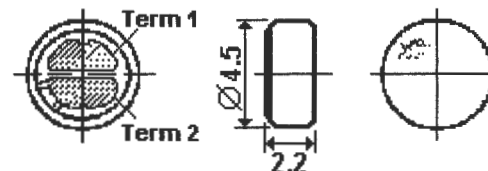

Schematic Diagram:

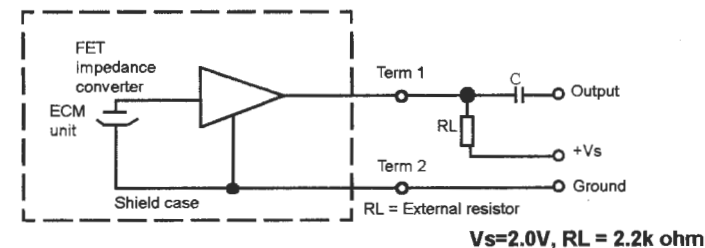

INTERVOX
International ©
 INTERNATIONAL COMPONENTS CORPORATION
 215 MCCORMICK DRIVE, BOHEMIA, NY 11716
 FAX: 631-952-9595 FAX: 631-952-9597

Title:

Electret Condenser Microphone

Code
474

Intervox Model #
MEC-422PD-02-744

Rev.
A

Scale: mm

Date: 1/15/02

Sheet 1 of 1