

ELECTRET CONDENSER MICROPHONE


MEU-65P-02-704 Series

Unidirectional

SPECIFICATIONS:

TYPE	MEU-65PD-02-704 MEU-65PN-02-704
FREQUENCY RESPONSE (Hz)	100 ~ 12,000 Hz.
DIRECTIVITY	Unidirectional
SENSITIVITY ($0dB=1V/\mu bar$)	- 70 (-704)
TOLERANCE	$\pm 4dB$
SENSITIVITY REDUCTION	Within -3dB@1.5V
S/N RATIO	More than 35 dB
OUTPUT IMPEDANCE	Low
MAX. OPER. VOLTAGE (VDC)	10 V
OPERATING VOLTAGE (VDC)	2.0 V
CURRENT CONSUMPTION (mA)	Max 0.5
DIMENSIONS (mm)	6.0 x 5.2
TERMINATION	PD=Pad PN=Pin


Typical Frequency Response Curve:

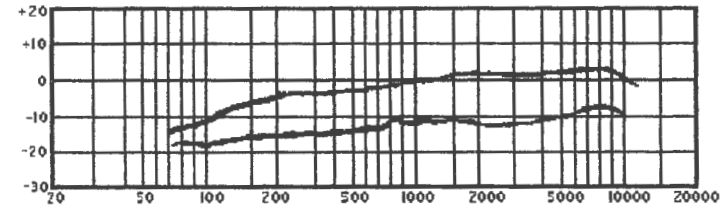

Dimensions:



Schematic Diagram:

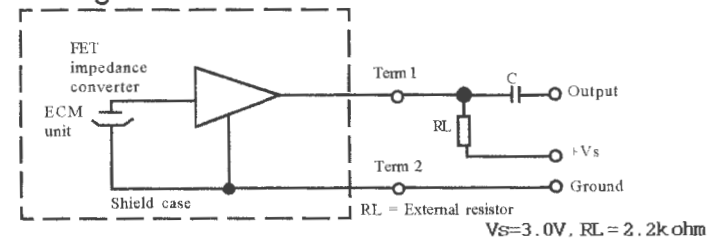

INTERVOX
International ©

INTERNATIONAL COMPONENTS CORPORATION
215 MCCORMICK DRIVE, BOHEMIA, NY 11716
FAX: 631-952-9595 FAX: 631-952-9597

Title:

Electret Condenser Microphone

Intervox Model #

MEU-65P-02-704 Series

Rev.

Scale:

Date:

Sheet 1 of 1