

ELECTRET CONDENSER MICROPHONE


MEU-85P-01-674 Series

Unidirectional

SPECIFICATIONS:

TYPE	MEU-85PD-01-704 MEU-85PN-01-704
FREQUENCY RESPONSE (Hz)	100 ~ 16,000 Hz.
DIRECTIVITY	Unidirectional
SENSITIVITY ($O_dB=1V/u\text{ bar}$)	- 67
TOLERANCE	$\pm 4dB$
SENSITIVITY REDUCTION	Within -3dB@1V
S/N RATIO	More than 38 dB
OUTPUT IMPEDANCE	Low
MAX. OPER. VOLTAGE (VDC)	10 V
OPERATING VOLTAGE (VDC)	1.5 V
CURRENT CONSUMPTION (mA)	Max 0.5
DIMENSIONS (mm)	8.0 x 5.0
TERMINATION	PD=Pad PN=Pin


Typical Frequency Response Curve:

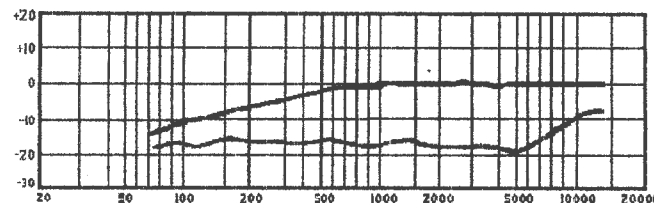

Dimensions:



Schematic Diagram:

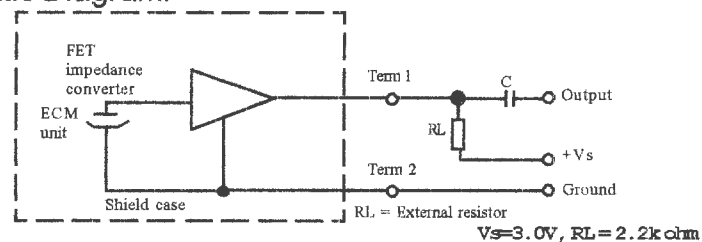

INTERVOX
International ©
 INTERNATIONAL COMPONENTS CORPORATION
 215 MCCORMICK DRIVE, BOHEMIA, NY 11716
 FAX: 631-952-9595 FAX: 631-952-9597

Title:

Electret Condenser Microphone

Intervox Model #

MEU-85P-01-674 Series

Rev.

Scale:

Date:

Sheet 1 of 1