

ELECTRET CONDENSER MICROPHONE


MEU-95P-01-674 Series

Unidirectional

SPECIFICATIONS:

TYPE	MEU-95PD-01-674 MEU-95PN-01-674
FREQUENCY RESPONSE (Hz)	100 ~ 16,000 Hz.
DIRECTIVITY	Unidirectional
SENSITIVITY ($0dB=1V/u\ bar$)	- 67 (-674)
TOLERANCE	+ 4dB
SENSITIVITY REDUCTION	Within -3dB@1V
S/N RATIO	More than 38 dB
OUTPUT IMPEDANCE	Low
MAX. OPER. VOLTAGE (VDC)	10 V
OPERATING VOLTAGE (VDC)	1.5 V
CURRENT CONSUMPTION (mA)	Max 0.5
DIMENSIONS (mm)	9.7 x 5.2
TERMINATION	PD=Pad PN=Pin


Typical Frequency Response Curve:

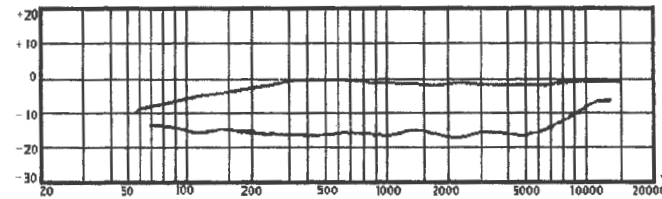

Dimensions:



Schematic Diagram:

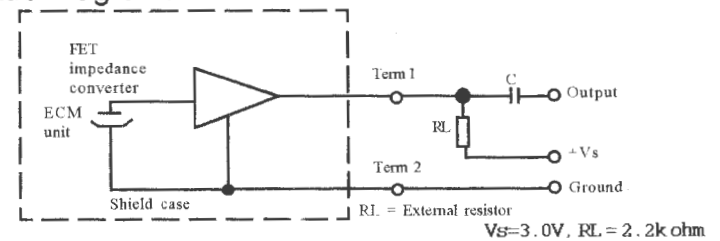

INTERVOX
International ©
INTERNATIONAL COMPONENTS CORPORATION
215 MCCORMICK DRIVE, BOHEMIA, NY 11716
FAX: 631-952-9595 FAX: 631-952-9597

Title:

Electret Condenser Microphone

Intervox Model #

MEU-95P-01-674 Series

Rev.

Scale:

Date:

Sheet 1 of 1