
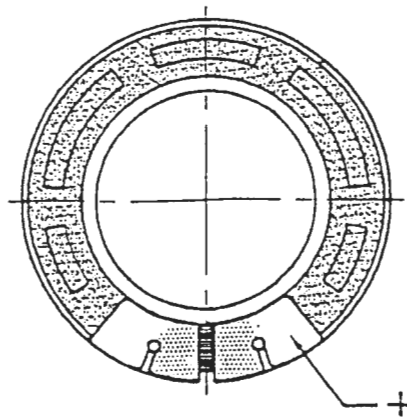


INTERVOX Speakers from International C

215 McCormick Drive, Bohemia, NY 11716 (631) 952-9595 (631) 952-9597 www.icc107.com

1. MODEL:	S125RMS
2. Dimension	Outer Diameter 30 mm. Baffle Opening 29 mm Height Refer to Drawing. Weight 9.8 grams
3. Magnet	Materials Rare Earth Size: 18 \varnothing x 10 \varnothing x 2 mm.
4. Nominal Impedance	8 ohm +/- 15 % at 2000 Hz.
5. Power Rating	Normal 400 mW. Maximum 800 mW
6. Lowest Resonant Frequency	670 +/- 150 Hz
7. Output Sound Pressure Level (S.P.L.)	88 +/- 3 dB / 0.4 Watt 0.5 Meter Average at 800, 1000, 1200, 1500 Hz
8. Frequency Range	400 ~10000 Hz. Average SPL - 10 dB
9. Distortion	10 % Maximum At 3350 Hz. 400 mW
10. Abnormal Sound Test	Must be Normal Tested By 1.8 Volts. Sine Wave
11. Load Test	White Noise with Weighted Filter 1.8 Volts. (RMS) 24 Hrs.
12. Polarity	Diaphragm shall move Forward when Apply a Positive DC Current to the "+" or "Marked" Terminal

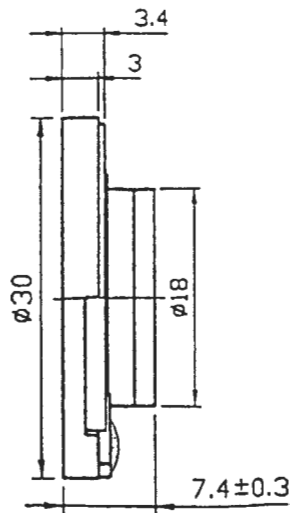


Unit: mm

Tolerance: +/- 0.2

Housing Material: ABS

Vol:1.788V(0.4W) Dis:0.5M
X:13.200kHz *Y:74.39dB ZA:Live Curve SSR Fund.

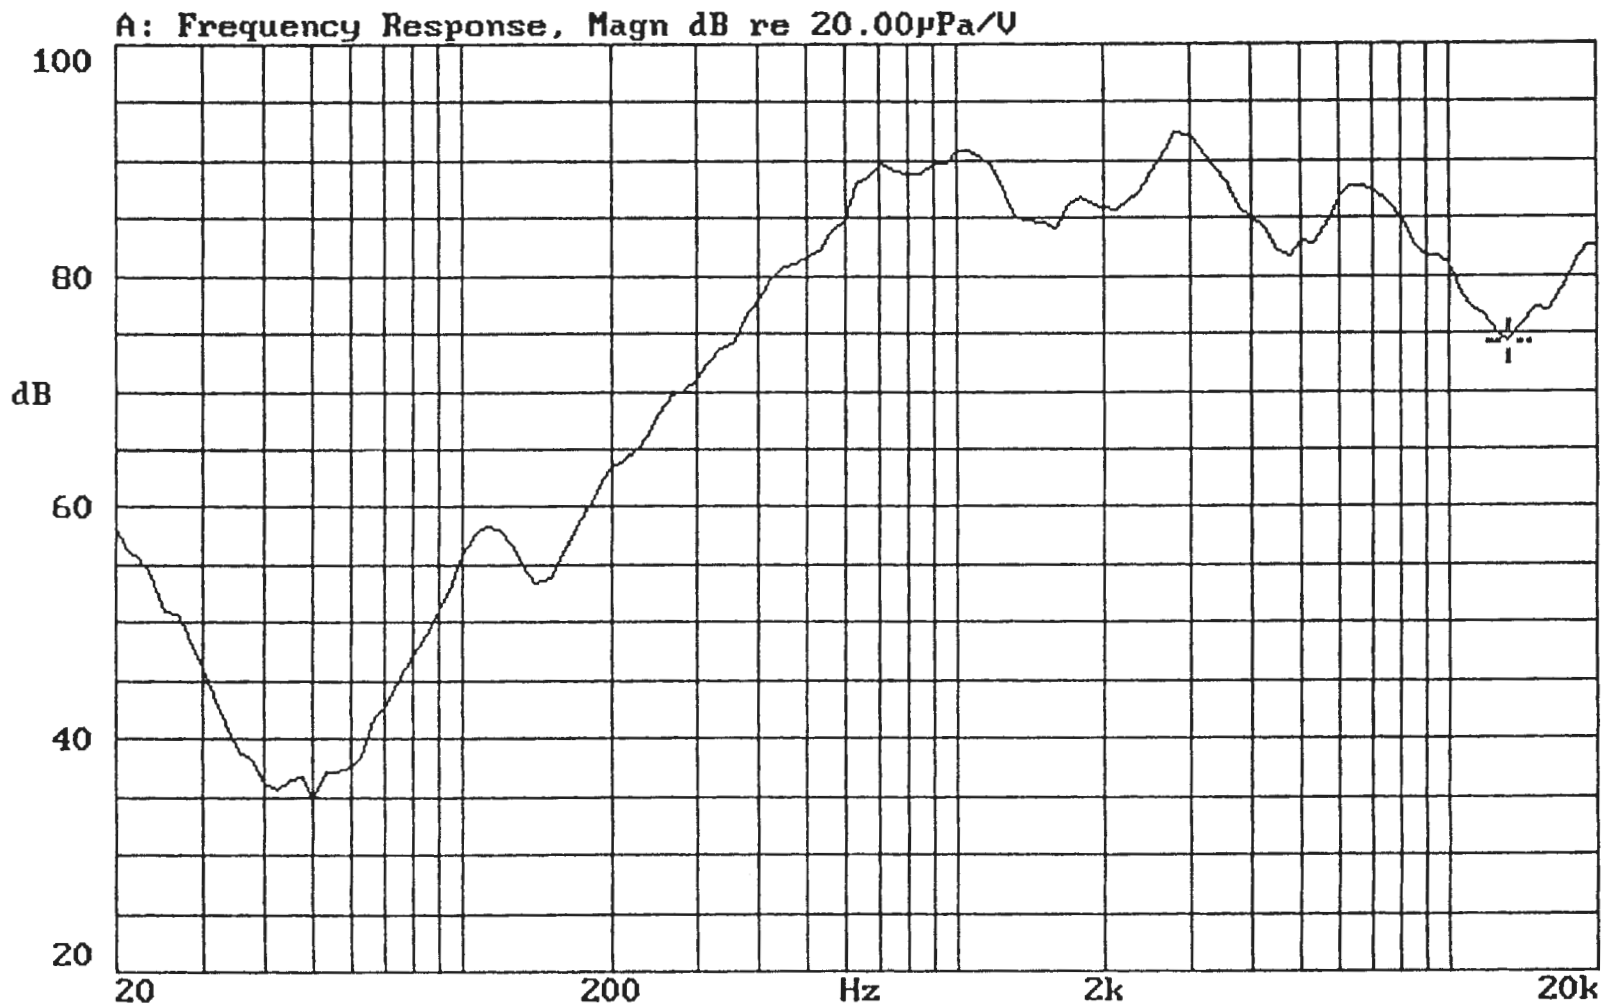

14-SEP-1995 09:58:52

Mode: SPEAKER

