
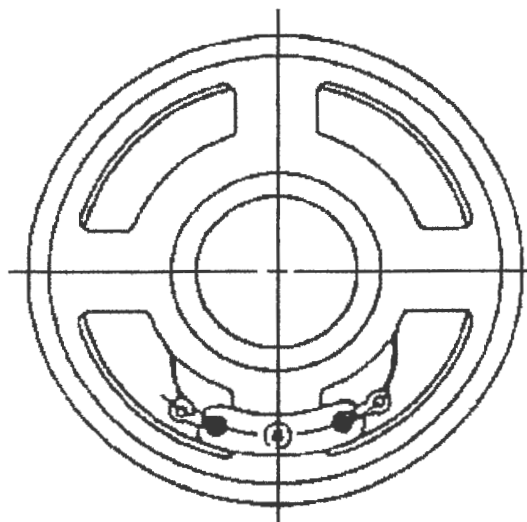


INTERVOX Speakers from **International C**

215 McCormick Drive, Bohemia, NY 11716 (631) 952-9595 (631) 952-9597 www.icc107.com

ICC Part No.	S150RL-R2W
1. Dimension	Outer Diameter: 40mm Baffle Opening: 37.5mm
	Height: Refer to Drawing Weight: 10.2 grams
2. Magnet	Material: Rare Earth Size: 12.5 X 1.5mm
3. Nominal Impedance	8 Ω \pm 15% at 1500Hz
4. Power Rating	Normal: 250 mW Maximum: 500 mW
5. Resonant Frequency	550 \pm 150 Hz
6. Output S.P.L.	87 \pm 3 dB / 0.25W 0.5M
	Average at 800, 1000, 1200, 1500 Hz
7. Frequency Range	300 ~ 4000 Hz Average S.P.L. - 10 dB
8. Distortion	10% Maximum at 500 Hz 250 mW
9. Abnormal Sound	Must Be Normal Tested by 1.41 Volts Sine Wave
10. Load Test	White Noise with Weighted Filter 1.41 Volts (RMS) 24 Hours
11. Polarity	Diaphragm shall move forward when apply a
	positive DC current to the "+" or marked terminal

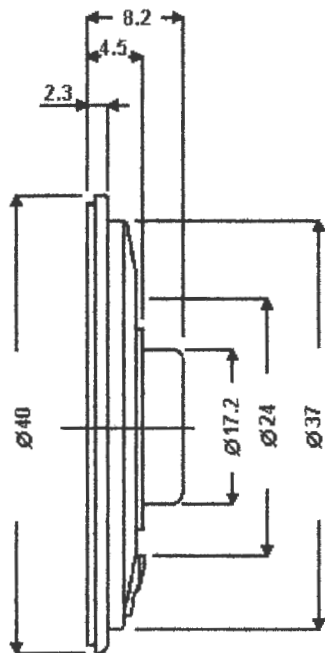

Unit: mm

Housing Material: METAL

INTERVOX Speakers from International ©

S150RL-R2W VOI: 1.4140V(0.25W) Dis: 0.5M
X: 4.7500KHz *Y:76.58dB ZA: Live Curve SSR Fund.

A: Frequency Response, Magn dB re 20.00 μ Pa/V

