




INTERVOX Speakers from International C

215 McCormick Drive, Bohemia, NY 11716 (631) 952-9595 (631) 952-9597 www.icc107.com

1.	MODEL:	S160RL			
2.	Dimension	Outer Diameter	40 mm.	Baffle Opening	35.8 mm.
		Height	Refer to Drawing .	Weight	9.4 Grams.
3.	Magnet	Materials	Rare Earth .	Size	∅ 12.5 x 1.5 mm.
4.	Nominal Impedance	8 Ω	± 15 %	At	1000 Hz.
5.	Power Rating	Normal	1000 mW.	Maximum	2000 mW.
6.	Lowest Resonant Frequency	430	± 20 %		Hz.
7.	Output Sound Pressure Level (S.P.L.)	90 ± 3 db / 1.0 Watt · 0.5 Meter.			
		Average at	600, 800, 1000, 1200		Hz.
8.	Frequency Range	250 ~ 6500	Hz.	Average SPL -	10 db.
9.	Distortion	5 %	Maximum At	1000 Hz.	1000 mW.
10.	Abnormal Sound Test	Must Be Normal Test By 2.9 Volts. Sine Wave.			
11.	Load Test	White Noise With Weighted Filter 2.9 Volts.(RMS) 24 Hrs.			
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.			
		Current to the "+" or "Marked" Terminal.			

MOUNTING NOTICE

AT LEAST
0.8mm
FOR
DIAPHRAGM
MOVING

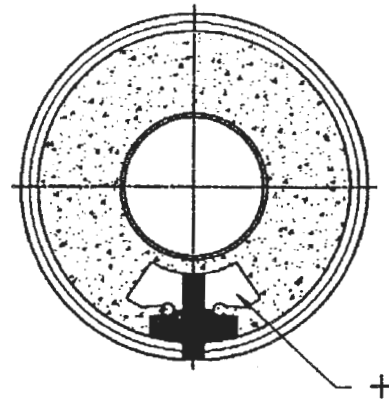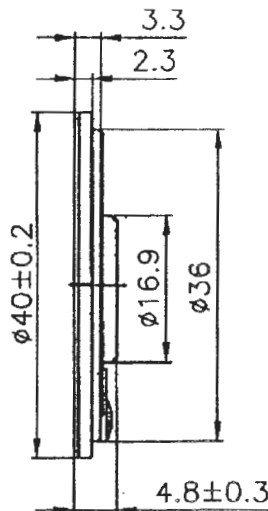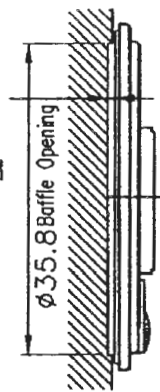

450

Unit : mm

Housing Material : METAL

INTERVOX Speakers from International ©

S160RL

450


UOL:2.828V(1.0W) DIS:0.5M

X:1.0000kHz

*Y:89.87dB

ZA:1.0000

SSR Fund.

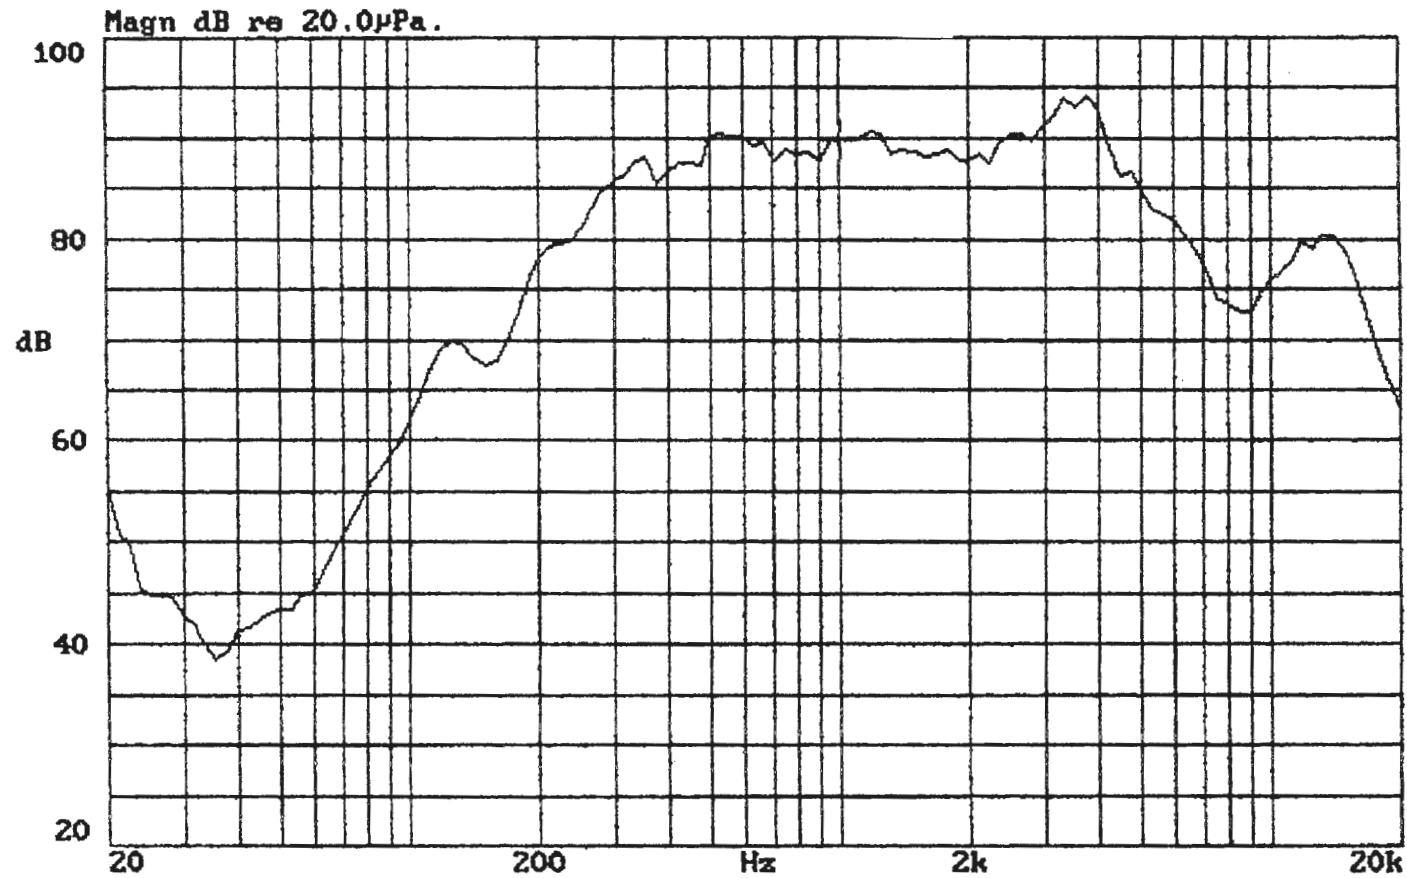

20-OCT-1999 14:44:30

Mode: SPEAKER

