

SPECIFICATION

FOR

APPROVAL

Description : Dynamic Speaker

ICC/Intervox Model No.: SB33X83-WW

ISSUE	CHECK	APPROVAL	CUSTOMER
Tan Qianfeng 02/10/12	Tang Helin 02/10/12	Tang Helin 02/10/12	



International Components Corporation

215 McCormick Drive, Bohemia, NY 11716

Tel: 631-952-9595 Fax: 631-952-9597

E-mail: oemsales@icc107.com <http://www.icc107.com/>

SPECIFICATIONS

Model No.

SB33X83-WW

Page

1/6

1. ELECTRICAL AND ACOUSTICAL SPECIFICATION

	Item	Specifications
1-1	Dimension	83.3×33.0×18.3t
1-2	Rated Input Power	2.0W
1-3	Max Input Power	4.0W
1-4	Rated Impedance	4±15% Ω /1KHz/1V
1-5	Resonance Frequency(f0)	250±20% Hz/1V
1-6	Sound Pressure Level	100±3 dB at (AVG 1.0,1.2,1.5,2.0)KHz 0.1M/2W
1-7	Frequency Range	200HZ ~ 20KHz
1-8	Total Harmonic Distortion	5%MAX. at 1KHz, 1V
1-9	Flux Density	1.0T
1-10	Polarity	When a positive DC Current is applied to the voice coil terminal marked +or red ,the diaphragm shall move forward
1-11	OperationTest	Must be normal at sine wave and program source2.0W.
1-12	Buzz,Rattle,etc.	Should not be audible at2.83 V sine wave between (200 Hz ~ 20KHz)
1-13	Weight	7.6g
1-14	Voice Coil Diameter	φ 13.28mm
1-15	Magnet (NdFeB)	φ 12.5×2.5t mm
1-16	Appearance	Should not exist any obstacle to be harmful to normal operation;damages,cracks,rusts and distortions,etc.

		02/10/12	Tan Qianfeng	Tang Helin	Tang Helin
Issue No	Description	Date	Issue	Check	Approval

International Components Corporation

SPECIFICATIONS

Model No.

SB33X83-WW

Page

2/6

2.ENVIRONMENTAL TEST

	Item	Specifications
2-1	High temp. Test	Keep 96 hours at $+80^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
2-2	Low temp. Test	Keep 96 hours at $-40^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
2-3	Humidity test	Keep 96 hours at $+40^{\circ}\text{C} \pm 3^{\circ}\text{C}$ relative humidity 95% and leave 3 hours in normal temperature and then checked.
2-4	Thermal cycle test.	Low temperature: $-40^{\circ}\text{C} \pm 3^{\circ}\text{C}$, temperature: $+80^{\circ}\text{C} \pm 3^{\circ}\text{C}$, cycle: 1 hour/cycle each, and then keep 96 hours.
2-5	Vibration	10~55~10Hz sin-wave sweep 15min. 5G(constant) X,Y, Z 3 direction. 2 hours each, total 6 hours.
2-6	Drop test	Free drop a unit from 100cm height to a board of 20mm thick x,y, z 6 direction. 1 times each, total 6 times.
2-7	Load test	Rated Power white noise is applied for 96 hours
2-8	Max Power test	Max power 1 min on – 2 min off 10 cycles.
2-9	Terminal strength test	Capable of withstand 1kg load for 15seconds without resulting in any damage or rejection.

PASS CRITERION :

After these test, the change of S.P.L shall be within ± 3 dB .

		02/10/12	Tan Qianfeng	Tang Helin	Tang Helin
Issue No	Description	Date	Issue	Check	Approval

International Components Corporation

SPECIFICATIONS

Model No.

SB33X83-WW

Page

3/6

3.MEASURING METHOD

3-1 .Test Condition

STANDARD

Temperature : 15 ~ 35℃

Relative humidity : 45% ~ 85%,

Atmospheric pressure : 860mbar to 1060mbar.

JUDGEMENT

Temperature : 20±3℃

Relative humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

3-2 . Standard Test Fixture

1.Input Power : 2.0W(2.83V)


2.Zero Level : -dB

3.Mode : TSR

4.potentiometer Range : 50dB

5.Sweep Time : 0.5sec

Standard test condition of speaker

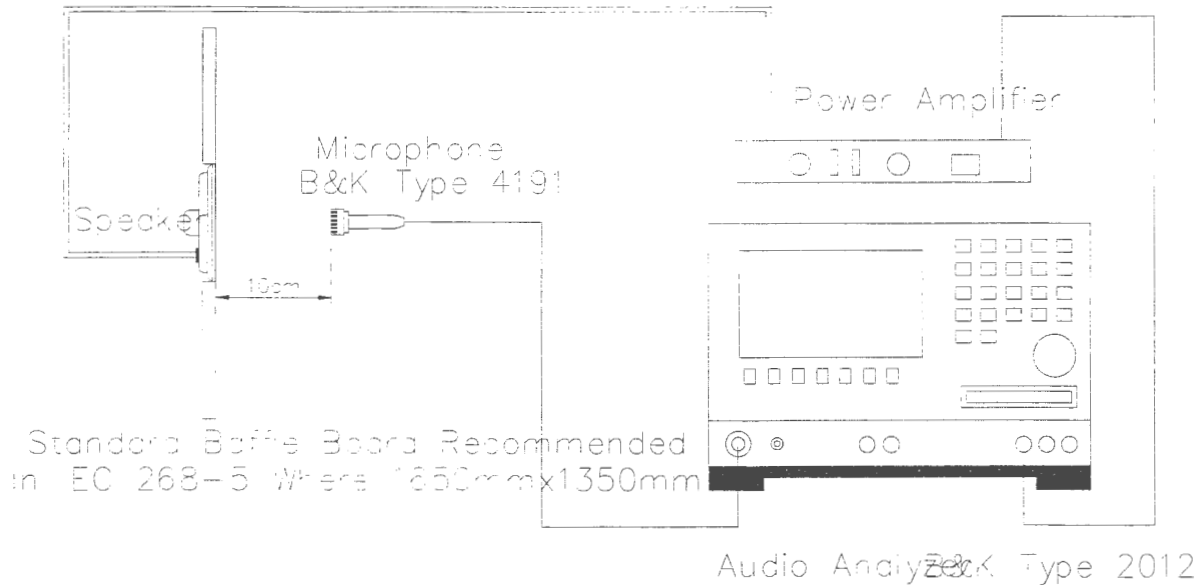

		02/10/12	Tan Qianfeng	Tang Helin	Tang Helin
Issue No	Description	Date	Issue	Check	Approval

International Components Corporation

SPECIFICATIONS

Model No.


SB33X83-WW

Page

4/6

4.FREQUENCY RESPONSE CURVE

2W 0.1m 2.83V

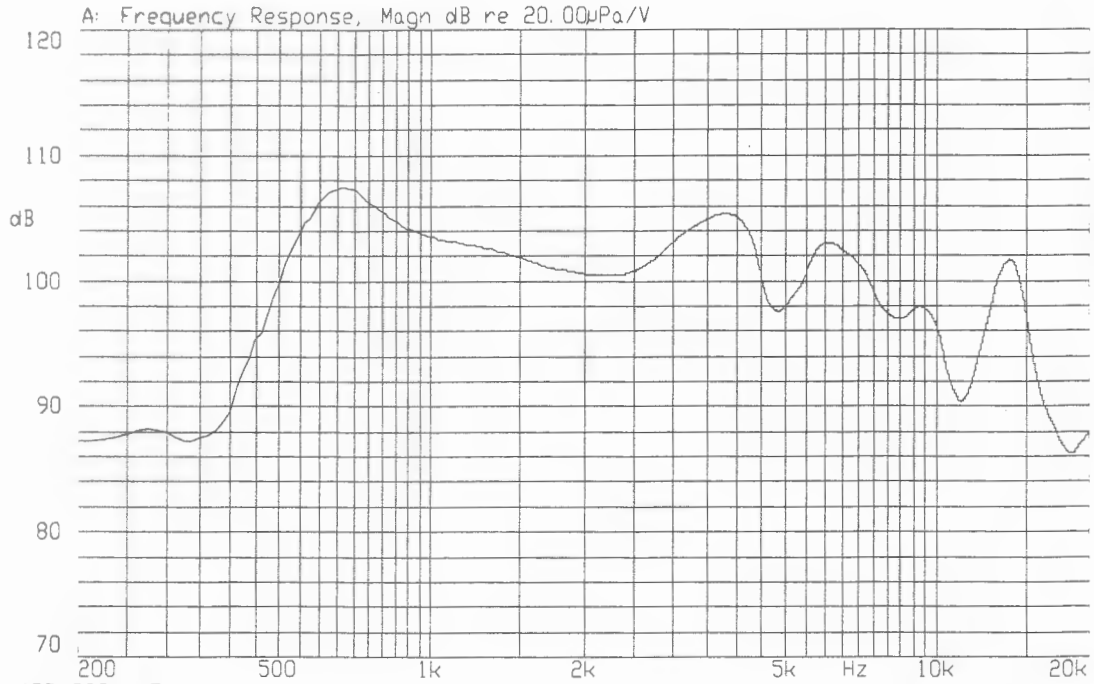

29-APR-2009 15:11:41

Mode: TSR



		02/10/12	Tan Qianfeng	Tang Helin	Tang Helin
Issue No	Description	Date	Issue	Check	Approval

International Components Corporation

SPECIFICATIONS

Model No.


SB33X83-WW

Page

5/6

5.DIMENSIONS

Unless otherwise specified, tolerance: ± 0.5 (unit: mm)

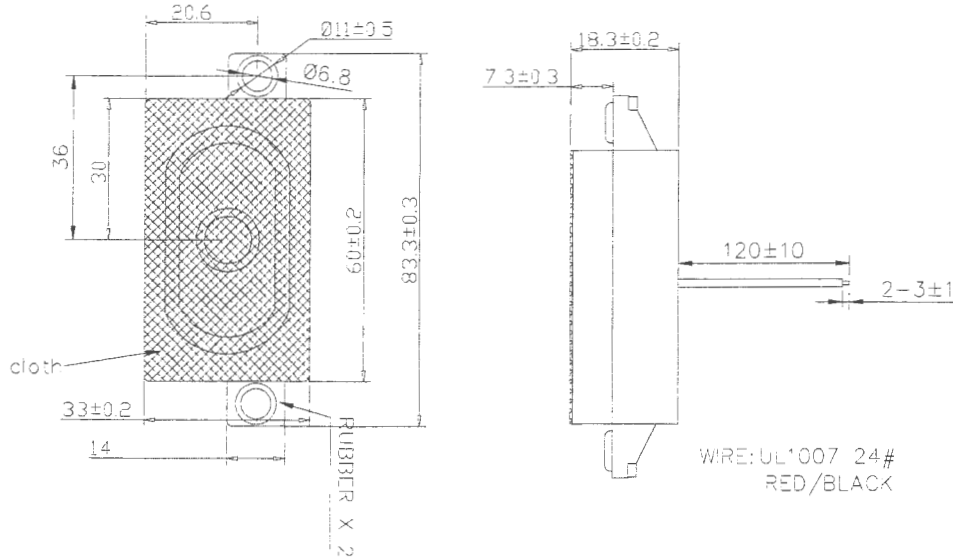

	Rear Cover	1	ABS757	
10	Front Cover	1	ABS757	
9	Shrapne	1	Silk cloth	
8	PCB	1	EPOXY	
7	Plate	1	2.0t	
6	Magnet	1	NdFeB	
5	Voice coil	1		
4	Dust cap	1	PAPER	
3	Yoke	1	1.5T	
2	Cloth conel	1	Cloth	
1	Frame	1		
PART NO.	PART NAME	Q'TY	MATERIAL	REMARK

		02/10/12	Tan Qianfeng	Tang Helin	Tang Helin
Issue No	Description	Date	Issue	Check	Approval

International Components Corporation

SPECIFICATIONS





Model No.

SB33X83-WW

Page

6/6

6.PACKING

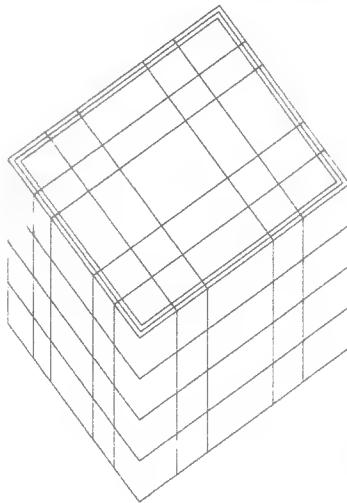

ITEM:
C/NO:
MADE IN CHINA

6	ff
Q	J
MODEL:	
QTY:	PCS
N.W:	Kg
G.W:	kg
SIZE:	cm
LOT NO	

		02/10/12	Tan Qianfeng	Tang Helin	Tang Helin
Issue No	Description	Date	Issue	Check	Approval

International Components Corporation